

PRODUCT DATA SHEET

CABLETYLE™ CABLE PROTECTION COVERS

UKT01ELE

Ref	TS179A
Date	March 2023
Pages	1 of 1

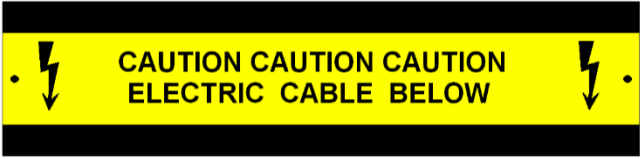
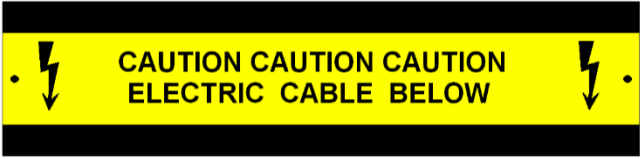
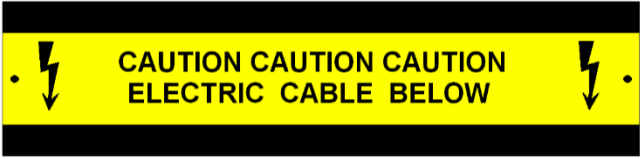
DESCRIPTION

Heavy duty yet lightweight plastic slabs made from recycled polyethylene. The top surface of the covers is laminated with a yellow plastic tape which has been pre-printed with an identification warning text. The covers have a hole at each end to allow interlocking by simply overlapping and securing using the special plastic joining pegs. The covers are free from PVC and made from homogenous recycled plastic which is not susceptible to freeze-thaw cracking that may occur with 'compressed plastic chip' covers.

INSTRUCTIONS / USES

Designed to be buried above underground utility lines, as close to the ground surface as possible (recommended depth 300mm). The covers afford a high level of impact resistance to help prevent third party damage. Their lightweight nature helps offer excellent value for money as they are easy to transport and install. Due to the overlap when interlocking, the distance covered by a single cover is 950mm.

TECHNICAL INFORMATION

<table border="1"> <tr> <th>DESIGN</th> </tr> <tr> <td></td> </tr> </table>		DESIGN		<table border="1"> <tr> <th>COVER SIZE</th> </tr> <tr> <td>150mm x 1M</td> </tr> </table>	COVER SIZE	150mm x 1M		
DESIGN								
								
COVER SIZE								
150mm x 1M								
<table border="1"> <tr> <th>THICKNESS</th> </tr> <tr> <td>6mm</td> </tr> </table>		THICKNESS	6mm	<table border="1"> <tr> <th>COLOUR</th> </tr> <tr> <td>Yellow tape, black text, black base</td> </tr> </table>	COLOUR	Yellow tape, black text, black base		
THICKNESS								
6mm								
COLOUR								
Yellow tape, black text, black base								
<table border="1"> <tr> <th>BASE SUBSTRATE</th> </tr> <tr> <td>Recycled thermoplastic material</td> </tr> </table>	BASE SUBSTRATE	Recycled thermoplastic material	<table border="1"> <tr> <th>TOPTAPE SUBSTRATE</th> </tr> <tr> <td>100% virgin polyethylene</td> </tr> </table>	TOPTAPE SUBSTRATE	100% virgin polyethylene	<table border="1"> <tr> <th>ELONGATION - LONGITUDINAL</th> </tr> <tr> <td>300%</td> </tr> </table>	ELONGATION - LONGITUDINAL	300%
BASE SUBSTRATE								
Recycled thermoplastic material								
TOPTAPE SUBSTRATE								
100% virgin polyethylene								
ELONGATION - LONGITUDINAL								
300%								
<table border="1"> <tr> <th>TENSILE STRENGTH</th> </tr> <tr> <td>16 MN/M²</td> </tr> </table>	TENSILE STRENGTH	16 MN/M ²	<table border="1"> <tr> <th>ELONGATION - TRANSVERSE</th> </tr> <tr> <td>350%</td> </tr> </table>	ELONGATION - TRANSVERSE	350%	<table border="1"> <tr> <th>MOISTURE ABSORPTION</th> </tr> <tr> <td>< 0.03%</td> </tr> </table>	MOISTURE ABSORPTION	< 0.03%
TENSILE STRENGTH								
16 MN/M ²								
ELONGATION - TRANSVERSE								
350%								
MOISTURE ABSORPTION								
< 0.03%								
<table border="1"> <tr> <th>PVC CONTENT</th> </tr> <tr> <td>The tape contains NO PVC</td> </tr> </table>	PVC CONTENT	The tape contains NO PVC	<table border="1"> <tr> <th>RESISTANCE TO ACID/ALKAI</th> </tr> <tr> <td>Highly resistant</td> </tr> </table>	RESISTANCE TO ACID/ALKAI	Highly resistant	<table border="1"> <tr> <th>E-MODULUS</th> </tr> <tr> <td>650 N/mm²</td> </tr> </table>	E-MODULUS	650 N/mm ²
PVC CONTENT								
The tape contains NO PVC								
RESISTANCE TO ACID/ALKAI								
Highly resistant								
E-MODULUS								
650 N/mm ²								
<table border="1"> <tr> <th>MELT FLOW INDEX</th> </tr> <tr> <td>0.3 – 0.4 g / 10 min</td> </tr> </table>	MELT FLOW INDEX	0.3 – 0.4 g / 10 min	<table border="1"> <tr> <th>BREAKDOWN VOLTAGE</th> </tr> <tr> <td>> 60 Kv/mm</td> </tr> </table>	BREAKDOWN VOLTAGE	> 60 Kv/mm	<table border="1"> <tr> <th>WEIGHT</th> </tr> <tr> <td>0.85 Kgs</td> </tr> </table>	WEIGHT	0.85 Kgs
MELT FLOW INDEX								
0.3 – 0.4 g / 10 min								
BREAKDOWN VOLTAGE								
> 60 Kv/mm								
WEIGHT								
0.85 Kgs								
<table border="1"> <tr> <th>PALLET QUANTITY</th> </tr> <tr> <td>1,000 covers</td> </tr> </table>	PALLET QUANTITY	1,000 covers	<table border="1"> <tr> <th>DENSITY</th> </tr> <tr> <td>920 – 945 Kgs/M³</td> </tr> </table>	DENSITY	920 – 945 Kgs/M ³			
PALLET QUANTITY								
1,000 covers								
DENSITY								
920 – 945 Kgs/M ³								

OTHER INFORMATION

There is no relevant BS British Standard or EN European Standard for this product although it does comply with the recommendations of NJUG 4 and the thickness, tensile strength, elongation, melt flow, density and chemical resistance properties (detailed above) all exceed with the requirements of ENATS 12/23.

CABLETYLE™ is a trade name of UK Tapes Ltd